



NWP222

Networked audio in- & output panel - 2 x XLR in- & out + BT (4 x 2 CH)

Highlights:

- 2 x XLR inputs & outputs
- Integrated Bluetooth receiver
- 4-channel Dante™/AES67
- Internal mixing & DSP processing

Product information:

The NWP222 is a Dante™/AES67 networked audio input panel, featuring two XLR input and output connectors and an integrated Bluetooth receiver, which can be used to transmit or receive audio signals in a Dante™ audio network. The audio inputs can be switched between line-level and microphone-level audio signals and phantom power (+48 V DC) can be applied to the XLR input connectors for powering condenser microphones.

Various further integrated functions such as integrated equalizing, automatic level control and other device settings can be configured through the AUDAC Touch™ app.

The front panel is finished with high-grade materials such as hardened glass makes them blend into any environment. These wall panels are compatible with standard EU-style in-wall boxes, these wall panels are the ideal solution for solid and hollow walls.

The IP-based communication makes it future-proof while also being backwards compatible with many existing products. In contrast, the limited PoE power consumption makes it compatible with any PoE network-based installation.



Certification:



Properties:

Internal mixing & EQ

Additional Inputs:

Bluetooth

System specifications:


| | |
|-------------------------|----------------------------------|
| Inputs | 2 x XLR female (in) |
| | 2 x XLR male out |
| Control | 2 buttons - Mic / Line switching |
| Indicators | 2 LED's (RGB) - Input status |
| Configurable settings | IP settings |
| | Device name |
| | Input range (Mic / Line) |
| | Gain |
| | Phantom power |
| | DSP (EQ) |
| | Mixing |
| Configuration | Audac Touch™ |
| Integrated DSP | Yes (EQ) |
| Automatic level control | Yes |
| Phantom power | +48 V DC |
| Power Supply | PoE powered (IEEE 802.3at) |
| Connectors | XLR Female (mic in) |
| | RJ45 (network + PoE) |
| | 1 x XLR male (audio out) |

Product Features:




| | |
|-----------------------|---|
| Construction | ABS |
| Front finish | Elegant ABS front panel with glass |
| Dimensions | 160 x 88 mm (W x H) (Remote wall panel) |
| Colours | White (RAL9003) (DWP240/W) |
| | Black (RAL9005) (DWP240/B) |
| Compatible devices | Any Dante™/AES67 compatible audio device |
| Installation standard | Compatible with EU installation materials |


Variants:

- NWP222/B - Black version
- NWP222/W - White version

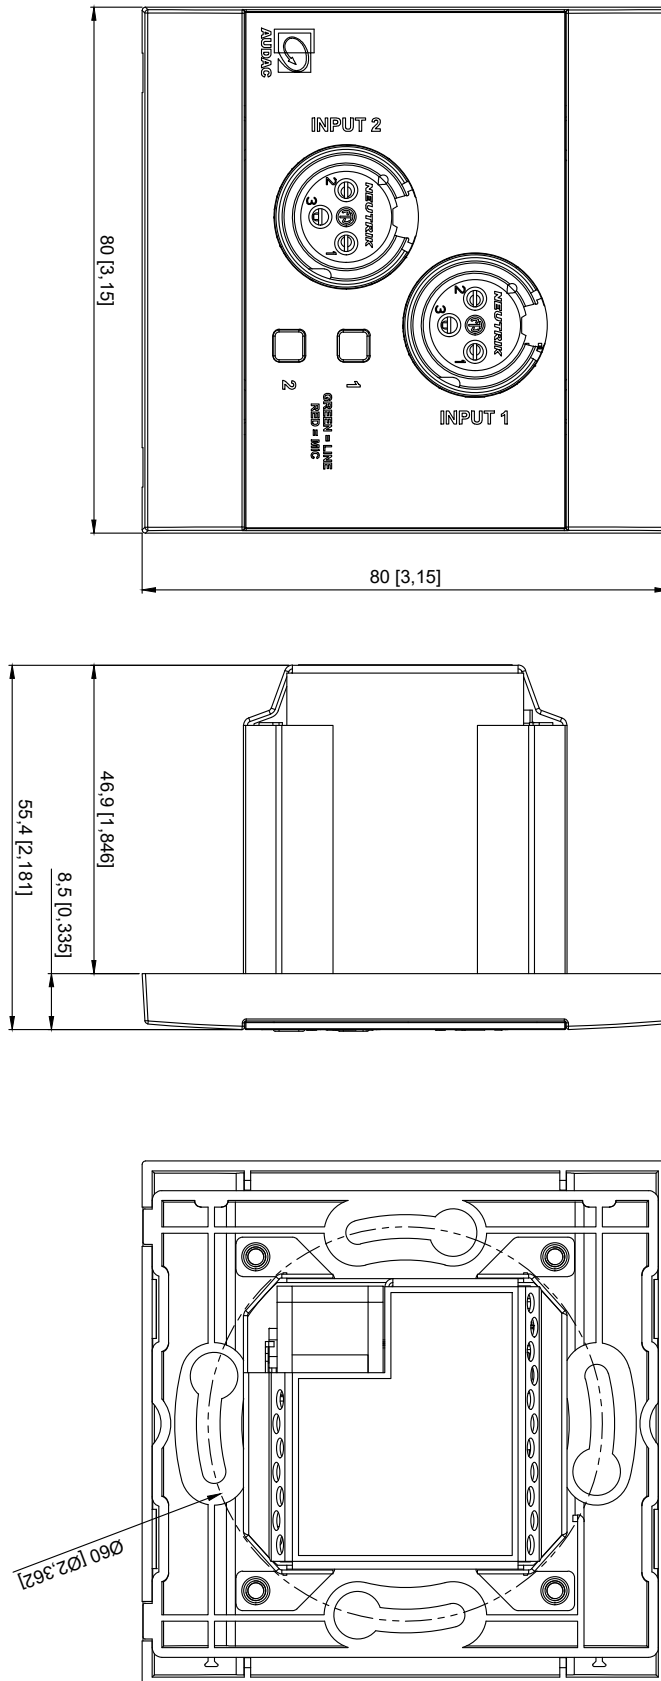

| | | | | |
|---------------------|--------------|---|--------------------|----------------------|
| NWP220 | | Product description | | |
| | | DANTE/AES67 NETWORKED AUDIO INPUT PANEL 2XXLR & BT (4CH) + POE | | |
| MM [INCH] | Scale | Outer dimensions (w x h x d) | Unit height | Weight |
| | 1 : 1 | 80 X 80 X 55,4 mm 3,15 X 3,15 X 2,211 " | N/A | 0,12 kg 0,265 lbs |

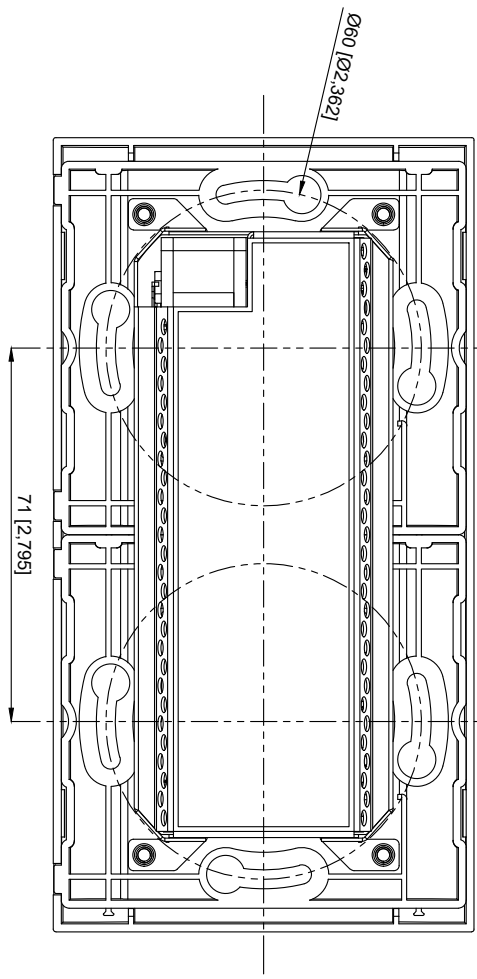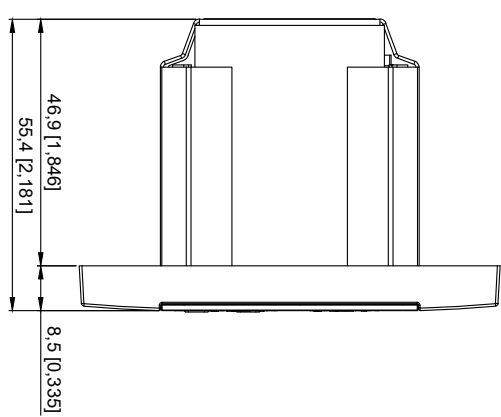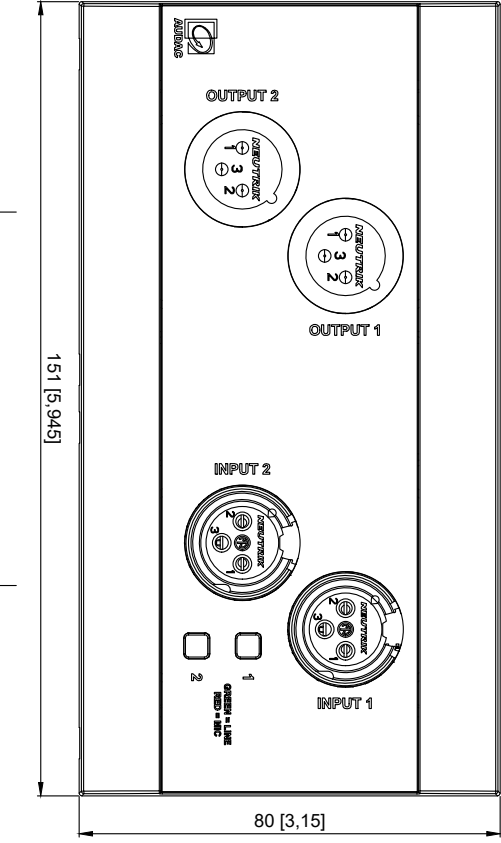

| | | | | | |
|--|-----------------------|-----------------|--|--|---------------------------|
|  | | <h1>NWP222</h1> | | Product description DANTE/AES67 NETWORKED AUDIO IN&OUTPUT PANEL 2X XLR IN & 2X XLR OUT & BT (4X2CH) + POE | |
| | | | | Outer dimensions (w x h x d) 151 x 80 x 55.4 mm 5.945 x 3.15 x 2.181" | Unit height N/A |
| MM [INCH] | Scale 4 : 5 | | | | |