



# **Product Specification**

Product Model:XWALL-III22012





**Product Specification** 



#### **Product Features**

- ♦ Built-in high-performance processor, 8-core CPU + 4-core GPU + 6TOPs NPU
- ♦ 8GB RAM + 64GB ultra-large storage
- ♦ Side gap sound emission with a 6-chamber, 6-driver speaker system
- ♦ Support wireless Screen Sharing Function
- ♦ WiFi 6, AP and STA modes, and WiFi 6 dual-band 2.4G/5G are available
- ♦ Support Bluetooth 5.3 Function
- ♦ Four-way HDMI input, enabling PBP, PIP, and POP video processing capabilities
- ♦ HDMI 2.0 output, realizing dual-screen display of different contents
- ♦ Expandable built-in PC, making easy integration of Windows system
- ♦ Built-in Android 13.0 system and Apps
- ♦ Support various scene modes for different application scenarios
- ♦ Built-in light sensors for intelligent space sensing, allowing for automatic brightness adjustment
- ♦ Overall standby power consumption≤0.5W
- → Fully front access and hot swapping available
- ♦ Support adjustment modes via Wi-Fi, network cable and USB connection
- ♦ Built-in RS232(RJ45)interfaces can realize remote centralized control function
- ♦ All-in-one ultra-slim and lightweight design, The thickness of the Module is 28mm
- ♦ Meet the RoHS directive requirements both in China and EU





| Product Parameter            |  |  |  |
|------------------------------|--|--|--|
| Overall Parameter            |  |  |  |
| Size                         | 220 inch   |  |  |
| Aspect Ratio                 | 16:9   |  |  |
| Resolution                   | 3840×2160  |  |  |
| Overall Size (L×H)           | 4910×2869mm                                      |  |  |
| Display Area (L×H)           | 4880×2744mm                                      |  |  |
| Screen Thickness             | 28mm   |  |  |
| Net Weight                   | 296kg( wall-mounting bar and stand not included) |  |  |
| Recommended Viewing Distance | ≥5m  |  |  |
| Maintenance Mode             | Front Access                                     |  |  |
| Installation Mode            | Wall-mounting                                    |  |  |
| Optical Parameter            |  |  |  |
| Brightness                   | 100~600cd/m² (Adjustable)                        |  |  |
| Refresh Rate                 | 3840Hz   |  |  |
| Gray Scale                   | 13~16bit   |  |  |
| Contrast                     | 6500:1   |  |  |
| Color Temperature            | 2300~9300K(Adjustable)                           |  |  |
| Viewing Angle                | Horizontal 160°, Vertical 140°                   |  |  |
| LED Lifespan                 | ≥100,000hrs                                      |  |  |
| Electrical Parameter         |  |  |  |
| Operation Voltage            | 100~240VAC 50/60Hz                               |  |  |
| Standby Power                | ≤0.5W  |  |  |





| Average Power Consumption of |  |  |  |
|------------------------------|--|--|--|
| Overall Unit                 | 1.514KW  |  |  |
| Maximum Power Consumption of |  |  |  |
| Overall Unit                 | 5.046KW  |  |  |
| System Parameter             |  |  |  |
| Operating System             | Android 13.0                                       |  |  |
| CPU                          | Four Cortex-A76+ four Cortex-A55, frequency 2.4GHz |  |  |
| RAM                          | 8GB  |  |  |
| Storage                      | 64GB   |  |  |
| Media Format                 | Support mainstream video format such as            |  |  |
|                              | MPEG-1,MPEG-2,MPEG-4,H.263,H.264,H.265,VC-1,VP9,V  |  |  |
|                              | P8,MVC,AV1;  |  |  |
|                              | Support audio formats such as MP3;                 |  |  |
|                              | Support JPG, JPEG, BMP, PNG, GIF and other image   |  |  |
|                              | format.  |  |  |
| Environmental Parameter      |  |  |  |
| Operation Temperature        | -10℃~40℃   |  |  |
| Operation Humidity           | 10%~80%RH No condensation                          |  |  |





## **I/O Ports**


| Туре                                | QTY                        |  |
|-------------------------------------|----------------------------|--|
| HDMI IN<br>(HDMI2.0 *1, HDMI1.4 *3) | 4 (2 internal, 2 external) |  |
| HDMI OUT                            | 1(external)                |  |
| POE                                 | 1(internal)                |  |
| USB 2.0                             | 1(internal)                |  |
| USB 3.0                             | 2(external)                |  |
| Type C                              | 1(external)                |  |
| 3.5 Audio Output                    | 2(1 internal, 1 external)  |  |
| 3.5 Audio Input                     | 1(external)                |  |
| RS232(RJ45)                         | 1(internal)                |  |
| USB Out                             | 1(external)                |  |
| LAN                                 | 2(internal)                |  |

USB Out\* is recommended for scenarios where the computer serves as the input source. By connecting directly to the computer via USB Out, it enables functionalities such as reading USB mouse, keyboard, wireless presenter, etc.





### Introduction to button and interface

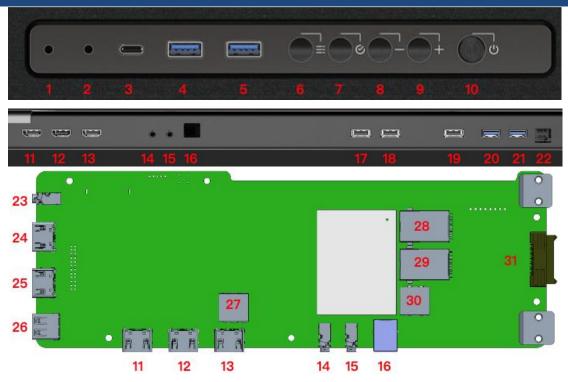

| NO. | Description   |
|-----|---|
| 1   | Light Sensor  |
| 2   | IR  |
| 3   | Type C  |
| 4   | USB3.0  |
| 5   | USB3.0  |
| 6   | Menu button(including brightness,color temperature,contrast, sound,signal source and other sub-menus)   |
| 7   | Bright/OK (1.When the menu is Not called up,it is the brightness adjustment button,and the + and - keys are used to adjust the brightness; 2.When the menu is called up, it is used as confirm button.) |
| 8   | 1.In the brightness adjustment mode, it is the brightness reduction key;  2.When the Menu is called up, it is the left/down/minus key  3.The default is the volume down button                          |
| 9   | 1.In the brightness adjustment mode,it is the brightness increase key;     2.When the menu Is called up,It is the right/up/Add key  |





|     | 3.The default is the volume up button                       |
|-----|---|
| 10  | Standby/Wake up button,dual-color indicator light(red/blue) |
| 11  | HDMI input (facedown)                                       |
| 12  | HDMI input (facedown)                                       |
| 13  | HDMI output (facedown)                                      |
| 14  | 3.5mm audio output(facedown)                                |
| 15  | 3.5mm audio input(facedown)                                 |
| 16  | USB out   |
| 17* | HDMI input (facedown)                                       |
| 18* | HDMI input (facedown)                                       |
| 19* | HDMI output (facedown)                                      |
| 20* | USB3.0 (facedown)   |
| 21* | USB3.0 (facedown)   |
| 22* | RJ45 LAN(facedown)  |
| 23  | 3.5mm audio output (built-in)                               |
| 24  | HDMI1 input (built-in)                                      |
| 25  | HDMI2 input (built-in)                                      |
| 26  | USB 2.0(built-in)   |
| 27  | RJ45 (RS232) (built-in)                                     |
| 28  | RJ45 Android LAN port (built-in)                            |
| 29  | RJ45 OPS LAN(built-in)                                      |
| 30  | POE(built-in)   |
| 31  | OPS slot (built-in)   |

<sup>\*17-22</sup> are available for those provided with optional built-in PC.





### **Introduction to remote control**

| Button Icon | Introduction          |  |
|-------------|-----------------------|--|
| Q           | Standby/Wake up       |  |
|             | Up                    |  |
|             | Down                  |  |
|             | Confirm               |  |
|             | Left                  |  |
|             | Right                 |  |
| +           | Voice +               |  |
| -           | Voice -               |  |
| S           | Back                  |  |
| ;¢:         | Brightness Adjustment |  |
| =           | Menu                  |  |
| <b>a</b>    | Main Interface        |  |







## **Introduction of built-in PC (optional)**

|                      | introduction of built-in PC (optional) |  |  |
|----------------------|--|--|--|
| System configuration |  |  |  |
| CPU                  | Intel® Core™ I5-1240P                  |  |  |
| Memory               | Dual channel DDR4,16GB(8GB*2)          |  |  |
| Graphics card        | Integrated graphics                    |  |  |
| Chipset              | ADL-P                                  |  |  |
| SSD                  | 1×M.2-2280 SATAIII SSD,256GB           |  |  |
| Ethernet             | 1×RJ45(10/100/1000M)                   |  |  |
| System Version       | Windows10                              |  |  |
| I/O Interface        |  |  |  |
| HDMI IN              | 2                                      |  |  |
| HDMI OUT             | 1                                      |  |  |
| USB 3.0              | 2                                      |  |  |
| 1000M RJ45           | 1                                      |  |  |
| PC Interface         | 40pin                                  |  |  |





| Accessories   |                  |          |
|---|------------------|----------|
| Remote Control  | 1                |          |
| Front Maintenance Tool  | 1                |          |
| Tool kit  | 1                |          |
| Wall-mounting Bar   | 1                |          |
| Ceiling mounted   | 1 set (optional) |          |
| Stand   | 1 set (optional) |          |
| Packing Dimension   |                  |          |
| Item  | Dimension        | Quantity |
| Screen And Module Dimension(wooden box)                         | 1560x1280x890mm  | 1        |
| Screen And Module Dimension(wooden box)                         | 1560x1240x1070mm | 1        |
| Lower Frame And Wall-mounting Bar Packing Dimension(wooden box) | 2064x556x497mm   | 1        |

#### Note:

- ◆The content of this specification may be adjusted and revised in real time without prior notice to provide as accurate specification parameters as possible.
- ♦ This product is an indoor product. It is strictly prohibited to use it in direct sunlight.
- ♦ In order to ensure long-term and more uniform display effect, do not play fixed images for a long time.
- ◆ For enhanced safety, it is advisable to switch off the LED display using either the designated button or the remote control before a power outage occurs.





# **Special Statement**

- ◆Intellectual Property Rights: The hardware design and software programs of this product are protected by copyright. The contents of this product and the manual shall not be copied without the authorization of the company.
- ◆ The contents of this manual are for reference only and do not constitute a commitment of any kind.
- ◆The company reserves the right to make improvements and changes to the product design without prior notice
- ◆ Note: HDMI, HDMI HD Multimedia Interface and HDMI logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.